
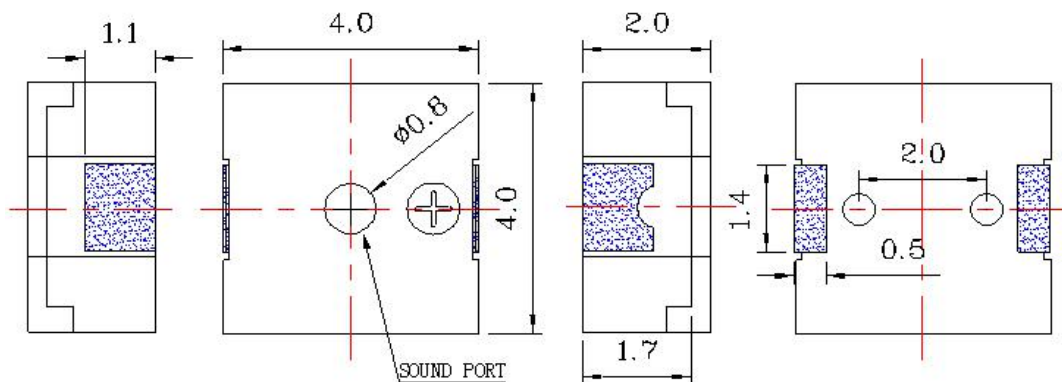


SPECIFICATION		
1	Model No.	EET4020S-03-4.0-12-R
2	Rated Voltage (V)	3.6
3	Operating Voltage (V)	2.0-4.0
4	Rated Current (mA)	≤110
5	Resonance Frequency (Hz)	4000
6	Coil Resistance (Ω)	12±3
7	Sound Output at 10cm (dB)	≥75
8	Operating Temperature (°C)	-20~+70
9	Storage Temperature (°C)	-30~+80
10	Weight (g)	0.07
11	Housing Material	LCP
12	Rohs	Yes

THIS DOCUMENT CONTAINS DATE  
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH  
 CO LTD. ANY USE OR REPRODUCTION, IN ANY FORM,  
 WITHOUT PRIOR WRITTEN PERMISSION OF  
 PROJECTS CHANGZHOU ESUNTECH CO LTD  
 IS PROHIBITED.  
 ©2003, Project Changzhou Esuntech Co Ltd


REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

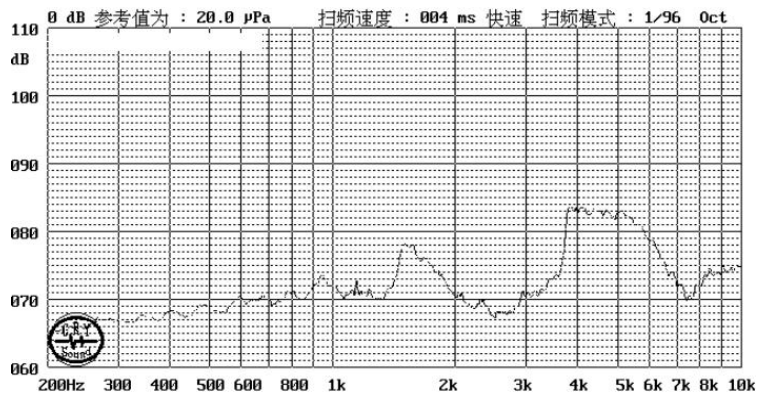

Package:  
 37\*35\*36cm/30kpcs/10reels/4kg  
 3kpcs/reel

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	A4	 Changzhou Esuntech Co., Ltd <a href="http://www.esuntech.com.cn">http://www.esuntech.com.cn</a>			EET4020S-03-4.0-12-R		
	TRANSDUCER				Edition	Sheet	